



TRIMDEK® 1015



Design and Installation Guide




LYSAGHT TRIMDEK® cladding has a subtle square-fluted profile, available in long lengths up to 11 metres, so on most jobs you can have one sheet from ridge to gutter without end-laps.

LYSAGHT TRIMDEK® cladding is made of high strength steel and despite its lightness, provides excellent spanning and rainwater carrying capacity.

The strength, spanning ability, lightness and rigidity of LYSAGHT TRIMDEK® cladding permits wide support spacings to be used with safety.

Profile

LYSAGHT TRIMDEK® 1015 is 1015 mm wide coverage profile with nominal 28.5 mm deep ribs. The end ribs are designed for anti-capillary action, to avoid any seepage of water through the lateral overlap. (Please refer fig. 1)

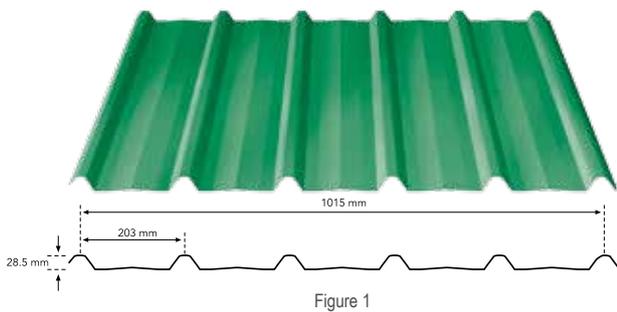

Material Specifications:

ZINCALUME® steel resin coated, minimum metallic coating mass is AZ150 (150g/m²), minimum yield strengths of G550 (550MPa) complies with AS1397 or IS15961.

COLORBOND® XRW is pre-painted steel for exterior roofing and walling. Its minimum metallic coating mass is AZ150 (150g/m²), minimum yield strengths is G550 (550 MPa) with Super Durable Polyester exterior paint system, total 25um DFT on topside and 10um DFT on reverse side complying with AS/NZS 2728- type 4 or IS15965- class 3

COLORBOND® Ultra is pre-painted steel for severe coastal or industrial environments (closer to source), minimum metallic coating mass is AZ200 (200g/m²), minimum yield strengths is G550 (550MPa), Super

Durable Polyester exterior paint system, total 25um DFT on topside and 15um DFT on reverse side complying with AS/NZS 2728- type 4 or IS15965- class 3.

(Please contact Tata BlueScope steel office for COLORBOND® spectrum series (metallic finish) and COLORBOND® XPD (PVDF) specification)

COLORBOND® steel with THERMATECH™ Technology

COLORBOND® steel with THERMATECH™ technology reflects more of the sun's heat, allowing both roofs and buildings stay cooler in summer. In moderate to hot climates, compared to roofing materials of similar colour with low solar reflectance, COLORBOND® steel with THERMATECH™ can reduce annual cooling and energy consumption by up to 15%* and also reduces peak roof temperature by up to 6°C**.

Lengths

Sheets are supplied custom cut.

Masses

| LYSAGHT TRIMDEK® 1015 | | | | |
|-----------------------|------|------------------|-------|-------------------|
| BMT* | TCT* | Product | kg/m | kg/m ² |
| 0.42 | 0.47 | ZINCALUME® steel | 4.214 | 4.152 |
| 0.42 | 0.47 | COLORBOND® steel | 4.29 | 4.22 |
| 0.45 | 0.50 | ZINCALUME® steel | 4.50 | 4.44 |
| 0.45 | 0.50 | COLORBOND® steel | 4.57 | 4.51 |

* Dimensions are in mm

Tolerances

Length: + 0 mm, - 15 mm

Width: + 4 mm, - 4 mm

*Depending on level of insulation, colour, building shape, orientation and function.

**Depending on the colour.



Maximum Support Spacing (in millimetres)

The maximum recommended support spacings are based on tests conducted in accordance with AS1562.1-1992, AS4040.1-1992 & AS4040.2-1992.

Roof spans consider both resistance to wind pressure and light roof traffic (traffic arising from incidental maintenance). Wall spans consider resistance to wind pressure only.

The pressure considered (in accordance with IS 875.3) is based on buildings up to 10 m high, Zone 3 (Basic wind speed $V_b = 47$ m/s), Class A, Terrain category 3, $K_1 = 1.0$, $K_2 = 0.91$, $K_3 = 1.0$, with the following assumptions made:

Roofs

$C_{p_e} = -1.20$ (internal cladding spans)

$C_{p_e} = -2.0$ (single and end cladding spans)

$C_{p_i} = +0.2$

Walls:

$C_{p_e} = -0.80$ (internal cladding spans)

$C_{p_e} = -1.20$ (single and end cladding spans)

$C_{p_i} = +0.2$

These spacings may vary for particular projects, depending on specific structure characteristics.

| Maximum Roof Run (m) as based on CSIRO* Formula | | | | | | | |
|---|--------------------------|------------|----|-----|-----|------|-----|
| | Rainfall Intensity mm/hr | Roof Slope | | | | | |
| | | 1° | 2° | 3° | 5° | 7.5° | 10° |
| LYSAGHT | 100 | - | - | 275 | 342 | 408 | 469 |
| TRIMDEK® 1015 | 150 | - | - | 183 | 228 | 272 | 313 |
| Flow Area = 3093 m ² | 200 | - | - | 138 | 171 | 204 | 235 |
| | 250 | - | - | 110 | 137 | 163 | 188 |
| | 300 | - | - | 92 | 114 | 136 | 156 |
| | 400 | - | - | 69 | 86 | 102 | 117 |
| | 500 | - | - | 55 | 68 | 82 | 94 |

*Commonwealth Scientific & Industrial Research Organisation

Maximum roof lengths for drainage measured from ridge to gutter (in metres)

Penetrations will alter the flow of water on a roof. For

assistance in design of roofs with penetrations, please seek advice from your nearest Tata BlueScope Steel's sales office.

Limit State Load Tables

LYSAGHT TRIMDEK® 1015 offers full benefits of the latest methods for modelling wind pressures. The wind pressure capacity table is determined by full scale tests conducted at BlueScope Steel's NATA-registered testing laboratory, using the direct pressure-testing rig. Testing was conducted in accordance with AS 1562.1-1992 (Design and installation of sheet roof and wall cladding-Metal) and AS 4040.2-1992 (Resistance to Wind Pressures for Noncyclonic Regions).

The pressure capacities for serviceability are based on a deflection limit of (span/120) + (maximum fastener pitch/30).

The pressure capacities for strength have been determined by testing the cladding to failure (ultimate capacity). These pressures are applicable when the cladding is fixed to a minimum of 1.0 mm, G550 steel. For material less than 1.0 mm thickness, seek advice from your nearest Tata BlueScope Steel's sales office.

| Type of span | Maximum Support Spacings (mm) | |
|----------------------------|-------------------------------|------|
| | Total Coated Thickness (mm) | |
| | 0.47 | 0.50 |
| Roofs | | |
| Single Span | 1090 | 1300 |
| End Span | 1280 | 1400 |
| Internal Span | 1600 | 1800 |
| Unstiffened eaves overhang | 150 | 200 |
| Stiffened eaves overhang | 300 | 350 |
| Walls | | |
| Single Span | 1780 | 1900 |
| End Span | 1600 | 1800 |
| Internal Span | 1900 | 2300 |
| Overhang | 150 | 200 |

- For roofs, the data are based on foot-traffic loading
- For walls, the data are based on pressures (see pressure table)
- Tables are based on supports of 1 mm BMT
- Please contact Tata BlueScope Building Products office before adopting for design




| LYSAGHT TRIMDEK® 1015: Limit state wind pressure capacities (KPa) | | | | | | | | | | |
|---|----------------|-----------|------|------|------|------|------|------|------|------|
| Span Type | Limit State | Span (mm) | | | | | | | | |
| | | 600 | 900 | 1200 | 1500 | 1800 | 2100 | 2400 | 2700 | 3000 |
| TRIMDEK® 1015 - 0.40 mm Base Metal Thickness (0.45 mm Total Coated Thickness) | | | | | | | | | | |
| SINGLE | Serviceability | 3.16 | 2.65 | 2.00 | 1.36 | 0.87 | 0.57 | 0.41 | - | - |
| | Strength* | 7.25 | 5.45 | 4.05 | 2.81 | 2.08 | 1.81 | 1.60 | - | - |
| END | Serviceability | 2.61 | 2.35 | 2.09 | 1.82 | 1.53 | 1.24 | 0.94 | 0.65 | 0.36 |
| | Strength* | 4.00 | 3.85 | 3.66 | 3.48 | 3.21 | 2.89 | 2.44 | 2.01 | 1.56 |
| INTERNAL | Serviceability | 3.21 | 2.69 | 2.26 | 1.95 | 1.68 | 1.39 | 1.08 | 0.82 | 0.63 |
| | Strength* | 7.03 | 5.81 | 4.71 | 3.69 | 2.95 | 2.46 | 2.23 | 2.09 | 1.99 |
| TRIMDEK® 1015 - 0.45 mm Base Metal Thickness (0.50 mm Total Coated Thickness) | | | | | | | | | | |
| SINGLE | Serviceability | 4.84 | 3.54 | 2.44 | 1.55 | 0.91 | 0.58 | 0.41 | - | - |
| | Strength* | 8.79 | 7.88 | 6.34 | 4.94 | 3.83 | 3.06 | 2.51 | - | - |
| END | Serviceability | 4.14 | 3.46 | 2.78 | 2.16 | 1.66 | 1.25 | 0.92 | 0.66 | 0.43 |
| | Strength* | 6.22 | 5.47 | 4.68 | 3.99 | 3.42 | 2.94 | 2.57 | 2.25 | 1.98 |
| INTERNAL | Serviceability | 4.91 | 4.01 | 3.19 | 2.52 | 2.01 | 1.64 | 1.37 | 1.13 | 0.93 |
| | Strength* | 7.66 | 6.52 | 5.49 | 4.54 | 3.83 | 3.32 | 3.00 | 2.73 | 2.49 |

*A capacity reduction factor of $\phi=0.9$ has been applied to strength capacities. Supports must be not less than 1 mm BMT *Please contact Tata BlueScope Building Products office before adopting for design

Installation

Fastening Sheets to Supports

LYSAGHT TRIMDEK® 1015 is pierce-fixed to timber or steel supports. This means that fastener screws pass through the sheeting. You can place screws through the crests or in the valleys. To maximise water tightness, always place roof screws through the crests. For walling, you may use either crest or valley fixing. Always drive the screws perpendicular to the sheeting and in the centre of the corrugation or rib. Don't place fasteners less than 25 mm from the ends of sheets. All the fasteners shall conform to Australian Standard AS3566 Class 3-4 (min.) for external application.

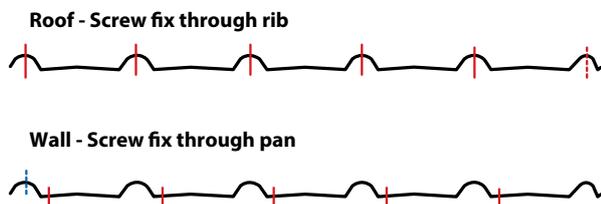

along side-laps.

However, when cladding is supported as indicated in maximum support spacings, side-lap fasteners are not usually needed for strength.

Ends of Sheets

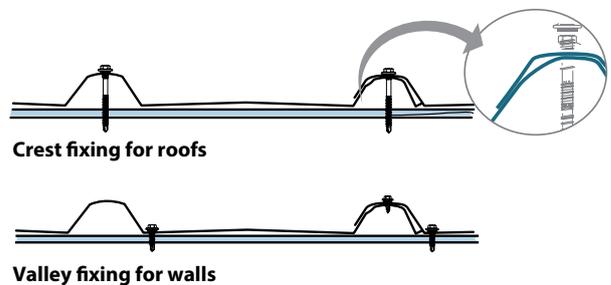


Figure 2

It is usual to allow roof sheets to overlap into gutters by about 50 mm. If the roof pitch is less than 25° or extreme weather is expected, the valleys of sheets should be turned down at lower ends and turned-up at upper ends by about 80°.

Lay Sheets toward Prevailing Weather

It is much easier and safer to turn sheets on the ground than up on the roof. Before lifting sheets onto the roof, check that they are the correct way up and the overlapping side is towards the edge of the roof from which installation will start. Place bundles of sheets over or near firm supports, not at mid span of roof members. To align the first bullnosed sheet, use a level on the

| Fasteners without insulation | | | | |
|------------------------------------|---------------------|-------------|---|--|
| Support Details | Number of Fasteners | | Crest Fixing Roof & Wall Application | Valley Fixing Wall Application only |
| | Per Sheet/support | Per sq. mt. | | |
| Steel up to 0.75 mm BMT | 5 | 5 | 13 - 13 x 55, Batten Tekes HG, Hex Head | 10-16 x16 Metal Tekes, Hex Head |
| Steel > 0.75 mm BMT up to 3 mm BMT | | | 12 - 14 x 45, Metal Tekes HG, Hex Head | 10-16 x16 Metal Tekes, Hex Head |
| Timber - Softwood | | | 12 - 11 x 65, Type 17 HG, Hex Head | 10-12 x 30, Type 17 HG, Hex Head |
| Timber - Hardwood | | | 12 - 11 x 50, Type 17 HG, Hex Head | 10-12 x 20, Type 17 HG, Hex Head |

- Note:
1. All screws are self drilling, self tapping with EPDM sealing washer unless otherwise noted
 2. The number of screws per support are per sq.m and are only for guidance, based on support spaced at 1 m and wall 0.6 m
 3. HG refers to Hi-Grips
 4. Please refer to the above data for guidance purpose only. You may contact Tata BlueScope Steel office for further information

gutter-end.

Sheet-Ends on Low Slopes

When TRIMDEK® 1015 is laid on slopes of 5° or less, cut back the corner of the under-sheet at the downhill end of the sheet, to block capillary action.

Walking on Roofs

Generally, keep your weight evenly distributed over the soles of both feet to avoid concentrating your weight on either heels or toes. Always wear smooth soft-soled shoes; avoid ribbed soles that pick up and hold small stones, swarf and other objects.

Adverse Conditions

If this product is to be used in marine, severe industrial or unusually corrosive environments, ask for advice from your nearest Tata BlueScope Steel's sales office .

Metal & Timber Compatibility


Lead, copper, stainless steel and green or some chemically treated timbers are not compatible with this product; thus don't allow any contact of the product with these materials, nor discharge of rainwater from them onto the product. If there are doubts about the compatibility of products being used, ask for advice from your nearest Tata BlueScope Steel office.

Maintenance

Optimum product life will be achieved if all external surfaces are washed regularly. Areas not cleaned by natural rainfall (such as top portion of walls sheltered by eaves) should be washed down every six months.

Storage and Handling

Keep the product dry and clear off the ground. If stacked or bundled product becomes wet, separate it, wipe it with a clean cloth and stack it to dry thoroughly. Handle materials carefully to avoid damage: do not drag materials over rough surfaces or each other, carry

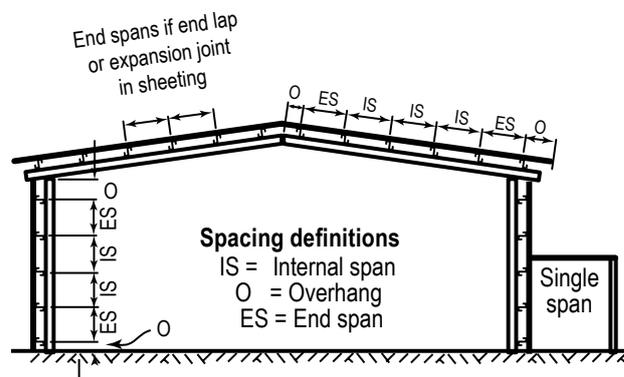

tools, do not drag them and protect it from swarf.

Sealed Joints

For sealed joints, use screws or rivets and neutral-cure silicone sealant branded as suitable for use with ZINCALUME® steel and COLORBOND® steel.

Cutting

For cutting thin metal on site, we recommend a circular saw with a metal-cutting blade because it produces fewer damaging hot metal particles and leaves less resultant burr than a carborundum disc.

Cut materials over the ground and not over other materials.

Sweep all metallic swarf and other debris from roof areas and gutters at the end of each day and at the completion of the installation. Failure to do so can lead to surface staining when the metal particles rust.

Non-Cyclonic Areas

The information in this brochure is suitable for use only in areas where a tropical cyclone is unlikely to occur. Ask for advice from your nearest Tata BlueScope Steel's sales office on designs to be used in cyclonic areas.



Global Excellence since 1857

Benefits

- TRIMDEK® is our most cost effective roofing and walling profile
- Strong and wider coverage, which makes it economical for all type of buildings
- Troughed valleys to enhance easy water flow, roof traffic and to avoid oil canning effect
- Long roof runs at shallow roof slope (min 3°)
- Specially designed ribs, with unique anti-capillary side lap, which makes it leak proof
- Curved roof : it is possible only in crimping option
- Very good rainfall capacity
- Easy to install on roof and wall cladding application

Product Descriptions

- All descriptions, specifications, illustrations, drawings, data, dimensions and weights contained in this catalogue, all technical literature and websites containing information from LYSAGHT® are approximations only. They are intended by LYSAGHT® to be a general description for information and identification purposes and do not create a sale by description. LYSAGHT® reserves the right at any time to:
 - (a) supply Goods with such minor modifications from its drawings and specifications as it sees fit; and
 - (b) alter specifications shown in its promotional literature to reflect changes made after the date of such publication.

Disclaimer, Warranties and Limitation of Liability

- This publication is intended to be an aid for all trades and professionals involved with specifying and installing LYSAGHT® products and not to be a substitute for professional judgement.
- Terms and conditions of sale available at local LYSAGHT® sales offices.
- Except to the extent to which liability may not lawfully be excluded or limited, Tata BlueScope Steel will not be under or incur any liability to you for any direct or indirect loss or damage (including, without limitation, consequential loss or damage such as loss of profit or anticipated profit, loss of use, damage to goodwill and loss due to delay) however caused (including, without limitation, breach of contract, negligence and/or breach of statute), which you may suffer or incur in connection with this publication.



Standard Colour Range



The above colours are only for illustrative purpose and actual colours may vary.



TOLL FREE

Email us at : lysaght@tatabluescopesteel.com



Tata BlueScope Steel Pvt. Ltd. CIN: U45209PN2005PTC020270
 Regd. Office: The Metropolitan, 4th Floor, Final PlotNo. 27,
 Survey No. 21, Wakdewadi, Shivaji Nagar, Pune - 411005. INDIA.
 Tel: +91 20 6621 8000

Website: www.tatabluescopesteel.com

Note:
 ©2019 Tata BlueScope Steel Pvt. Ltd. All rights reserved. No part of this brochure may be reproduced or transmitted in any form or by any means, electronic or mechanical including photocopy, recording, or any information storage and retrieval system, without permission in writing from Tata BlueScope Steel Pvt. Ltd.. All brand names mentioned in this brochure are registered trademarks of BlueScope Steel Limited under license to Tata BlueScope Steel Pvt. Ltd.*