

This literature supersedes all previous issues.

### Product

COLORBOND® Metallic steel (metallic coated & pre-painted) designed by BlueScope, Australia & manufactured in India by Tata BlueScope Steel to provide an aesthetically distinctive "metallic" effect. It is an ideal choice for exterior application in prestigious architectural projects.


### Standard

Paint Coating\*: AS / NZS 2728 Type 3 / ASTM A755M / IS 15965 Class 3

Substrate\*\*: AS 1397 / ASTM A792M / IS 15961

\*COLORBOND® Metallic steel is possible against other standards also

\*\*Substrate: ZINCALUME® steel G550 /550 class 1/YS550 or G350/340 Class 2 / YS350 or G300 /YS300 with metallic coating of 150 g/m<sup>2</sup> minimum

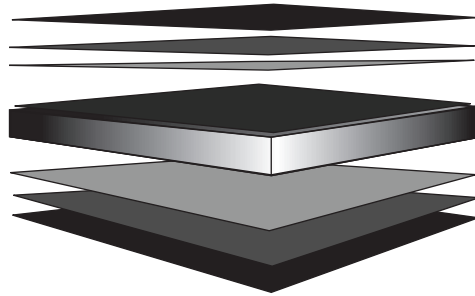

### Cross Sectional View of COLORBOND® Metallic steel

- Top Coat\* Metallic PVDF Resin (Nominal 20µm)\*\*
- Universal Corrosion Inhibitive Primer (Nominal 5µm)\*\*
- Conversion Coating
- ZINCALUME® - AZ150 steel substrate
- Conversion Coating
- Universal Corrosion Inhibitive Primer (Nominal 5µm)\*\*
- Backer Coat\* (Nominal 5µm)\*\* (Refer Note 4)

\*The top coat has inorganic pigments and is free of Lead.

\*\*Triple spot minimum coat thickness - 80% of nominal value.

### Properties of Steel Base (other steel base possible on agreement)

Chemical Element	Guaranteed Maximum (%)			
	G550*/550**/YS550 <sup>†</sup>	G300*/YS300 <sup>‡</sup>	340 Class2**	G350*YS350 <sup>‡</sup>
Carbon (C)	0.200	0.250	0.250	0.250
Manganese (Mn)	1.200	1.600	1.350	1.600
Phosphorus (P)	0.040	0.050	0.040	0.050
Sulphur (S)	0.03	0.035	0.04	0.035

Note: \*AS 1397, \*\*ASTM A792M, <sup>†</sup>IS 15961

Mechanical Property	Guaranteed Minimum			
	G550*/550**/YS550 <sup>†</sup>	G300*/YS300 <sup>‡</sup>	340 Class2**	G350*/YS350 <sup>‡</sup>
Yield Strength, MPa	550	300	340	350
Tensile Strength, MPa	570	340	-	420
Elongation on 80 mm GL (≥ 0.60 mm), %	2	18	12	14
Transverse Bend Test (180° Bend)	-	2t	-	t

\*\*ASTM A792M (i) GL of 50mm, (ii) grade 550 in class 1, (iii) grade 340 in class 2

Note: Mechanical properties are guaranteed at ambient/room temperature | Tensile test in longitudinal direction

### Dimension Range & Tolerances

Range	Base Metal Thickness (mm)	
	Tolerance	
	Width ≤ 1200	Width > 1200
0.03 - 0.50	± 0.03	± 0.04
0.51 - 0.80	± 0.04	± 0.05
0.81 - 1.2	± 0.05	± 0.06
> 1.20	± 0.06	± 0.07

Width (mm)	
Range	Tolerance
< 900 (in slit edge)	+1 / -0
914 - 1000	+4 / -0
1001 - 1220	+5 / -0

a) Specific requirement is possible on agreement b) Other dimension & shape tolerances as per AS 1365/ ASTM A568M / ASTM 924M/ IS/ISO 16163

### Paint Line Tested Properties of Top Coat

Property	Measured By	Test Method	Results
Hardness	Pencil	AS/NZS 1580.405.1 / IS 15965	HB or Harder
Adhesion	Reverse Impact	AS/NZS 2728 (App.E) / IS 15965 (Annex B)	≥ 10 Joule
	T - Bend	AS/NZS 2728 (App.F) / IS 15965 (Annex B)	Maximum 5T.
Specular Gloss	60° meter	AS/NZS 1580.602.2 / ASTM D 523 / IS 101 (Part 4/ Sce 4)	Nominal +/-10 units.

### Expected Product Service Performance (Top Coat)

Property	Measured After	Test Method	Results		
Adhesion	Natural well washed exposure (10 years)	AS/NZS 1580.457.1	No flaking or peeling. Refer Note 9.		
Flexibility	T-Bend	ASTM D 4145	Maximum 7T (no cracking). Refer Note 5.		
Resistance to colour change	QUV (2000 hours)	ASTM G 154 ASTM D 2244	ΔE cielab 2000 Intermediate Color: ≤ 1 units		
	Natural well washed exposure (10 years)	ASTM D 2244 AS/NZS 1580.457.1	ΔE cielab 2000 - Refer Note 9. Light Colour: ≤ 3.5 units Int. Colour: ≤ 3.5 units, Dark Colour: ≤ 5 units		
Resistance to chalking	QUV (2000 hours)	ASTM G 154 AS/NZS 1580.481.1.11 (Method B)	Chalk Rating: ≤ 1		
	Natural well washed exposure (20 years)	AS/NZS 1580.457.1 AS/NZS 1580.481.1.11 (Method B)	Chalk Rating: ≤ 2. Refer Note 9.		
Resistance to corrosion	Salt Spray (1000 hours)	ASTM B117 AS 2331.3.1 NCCA Tech Bulletin 5.4.6 AS/NZS 2728 (App. I) AS/NZS 1580.481.1.9 (Blisters) AS/NZS 1580.408.4 (Adhesion) IS 15965 (Annex D)	Blister density: ≤ 2 Blister size: ≤ S3 Undercut from a score: ≤ 2 mm No loss of adhesion or corrosion		
Resistance to humidity	1000 hours	ASTM D 4585 NCCA Tech Bulletin 5.4.5 AS/NZS 1580.481.1.9 AS/NZS 1580.408.4 IS 15965 (Annex D)	Blister density: ≤ 3 Blister size: ≤ S2 No loss of adhesion or corrosion		
Resistance to acids	Exposure	ASTM D 1308 (3.1.1) AS/NZS 1580.481.1.9 ASTM D 2244	No discoloration or blistering. Refer Note 6.		
Resistance to alkalis					
Resistance to solvents					
Resistance to heat	Exposure 100° C continuous (500 hours)	ASTM D 2244	Colour change ΔE cielab 2000: ≤ 3 units		
Resistance to fire	Exposure	AS/NZS 1530.3	Index		
			Ignitability	0-20	0
			Spread of flame	0-10	0
			Heat evolved	0-10	0
Smoke developed	0-10	0-1			
Resistance to abrasion	Scratch	AS 2331.4.7	Typically 2000 g		

**Note:**

- COLORBOND® Metallic steel may not be suitable if it is intended for use in an exterior application within 1km of salt marine locations, severe industrial or abnormally corrosive environments; in areas not washed by rain, or in applications where it will be wholly or partly buried in the ground. Before purchase, check suitability by contacting Tata BlueScope Steel sales office.
- Result mentioned are for standard colours of COLORBOND® Metallic steel under normal well washed conditions of exposure away from marine location.
- The product is supplied with a nominal 25 unit (60°) gloss Top Coat.
- Backing Coat - a thin coating applied to the reverse surface of the prepainted coil. It also give additional durability to the reverse surface during the service life of the product, but for aesthetic reasons it is not recommended for exposure to sunlight. Performance Requirements are generally not applicable to backing coats. The backer coat in specific color and with foam adhesion properties is possible on agreement.
- The minimum internal bend diameter for forming process to achieve no paint cracking (visibility using x10 magnification) and to avoid paint adhesion issues are specified by T-Bend flexibility and T-Bend adhesion results respectively - where 1T equals the Total Painted Thickness (TPT) in mm of the material. These results are based on testing at 20-25° Celsius.
- COLORBOND® Metallic steel has good resistance to accidental spillage of solvents such as methylated spirits, white spirit, mineral turpentine, toluene, trichloroethylene, dilute mineral acids and alkalis. However, all spillages should be immediately removed by water washing and drying.
- For most products, the metallurgical ageing process which is inherent in the paint stoving cycle will result in some loss of ductility compared with unpainted product. However, minimum strength levels designated by relevant standards will still be qualified.
- Improper storage or the use of un-approved roll-forming lubricants may adversely affect colour. Material which becomes wet while in stacks or bundles must be separated and dried (refer AS/NZS 2728 Appendix L).
- Values quoted are for panels exposed in accordance with AS/NZS 2728. Variations for in-situ performance may occur due to complexity of building design and location.
- COLORBOND® Metallic steel needs to be installed in the same direction of processing to get uniform appearance.

**Note:**

©2021 Tata BlueScope Steel Pvt. Ltd. All rights reserved. This Technical Data Sheet and its content is copyright of Tata BlueScope Steel Pvt. Ltd. No part of this Technical Data Sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical including photocopy, recording, or any information storage and retrieval system, without permission in writing from Tata BlueScope Steel Pvt. Ltd.  
ZINCALUME® steel and COLORBOND® steel are the registered trademarks of BlueScope Steel Limited under license to Tata BlueScope Steel Pvt. Ltd.

**Tata BlueScope Steel Pvt. Ltd.**  
CIN : U45209PN2005PTC020270  
**Regd. Office:** The Metropolitan, Final Plot No. 27,  
Survey No. 21, Wakdewadi, Shivaji Nagar,  
Pune - 411005. INDIA. Tel: +91 20 6621 8000  
Website: www.tatabluescopesteel.com  
Email: coatedsteel@tatabluescopesteel.com