

Durable, Strong Roof and Wall Sheets




TATA BLUESCOPE STEEL

COLORing lives in steel




DURASHINE® Roof

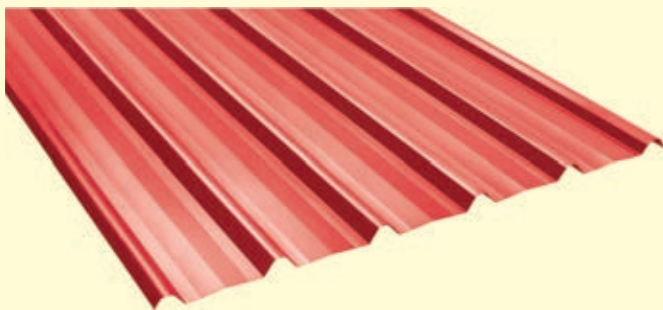

Roof Specifications

Total coated thickness (mm)	0.35 / 0.45 / 0.50 / 0.60
Sheet length * (mm)	2440 (8ft), 3050 (10ft), 3660(12ft), 4270 (14ft), 4880 (16ft)
Effective cover width (mm)	Nominal 1015
Overall width (mm)	Nominal 1072
Minimum roof slope (degrees)	3

* Sheet length in feet is approximate value

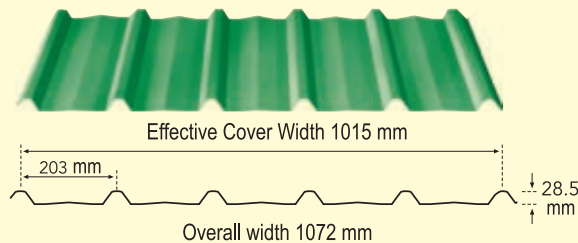

Maximum Support Spacing (mm)*


Type of Span	Roof	Wall
Single Span	950	1700
End Span	1200	2450
Internal Span	1750	2850

* Terms and conditions applicable

Anti-capillary Groove: Anti-capillary grooves ensure leak-proof performance

Wider Valleys : Wider valleys ensure higher water discharge during heavy rains


DURASHINE® Wall

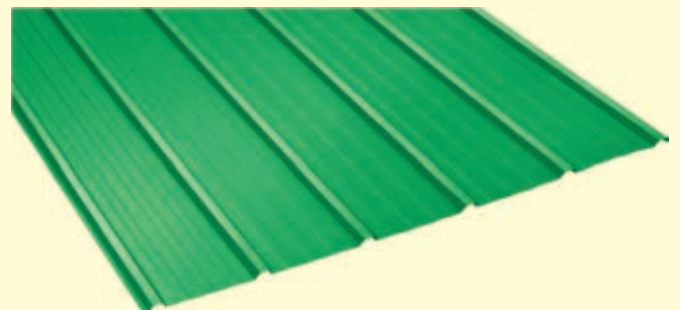

Wall Specifications

Total Coated Thickness (mm)	0.35 / 0.45 / 0.50 / 0.60
Sheet length * (mm)	2440 (8ft), 3050 (10ft) 3660 (12ft), 4270 (14ft)
Effective cover width (mm)	Nominal 1110
Overall width (mm)	Nominal 1150

* Sheet length in feet is approximate value

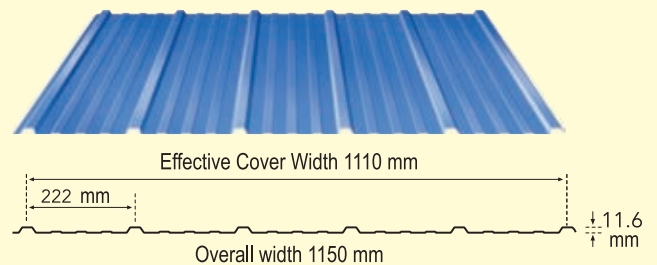

Maximum Support Spacing (mm)*

Type of Span	Wall
Single Span	1150
End Span	1500
Internal Span	1650

* Terms and conditions applicable

Widest Profile: DURASHINE® wall is one of the widest wall profile sheets available, which is also quick and easy to install

DURASHINE® Roof & Wall

Available Standard Colours*

Asian White™

Cool Blue™

Nuvo Blue™

Bright Green™

Pearl Green™

Castle Red™

Passion Red™

Cherry Red™

Graphite Grey™

Coffee Brown™

*Disclaimer: 1) The above colours are only for illustrative purpose and actual colours may vary.
2) All the above colour names are trademarks under DURASHINE® brand.

Benefits of DURASHINE® Roof & Wall

Long Lasting

- Zinc-Aluminum alloy coating provides excellent corrosion resistance compared to galvanized steel
- Its superior paint system gives longer product life over pre-painted galvanized steel
- The profiles last 2-4 times longer than ordinary colour coated sheets


High Strength (Min. 550MPa)

- Manufactured from high strength raw materials
- Saves overall cost of supporting structures. Light weight makes it easy to handle
- Longer span and wider spread allow design freedom


Better Thermal Efficiency

- DURASHINE® profiles have high heat reflectivity thereby making it an energy efficient solution
- It maintains inside temperature as compared to galvanized sheets, asbestos sheets, concrete slab and clay tiles

DURASHINE® Typical Accessories

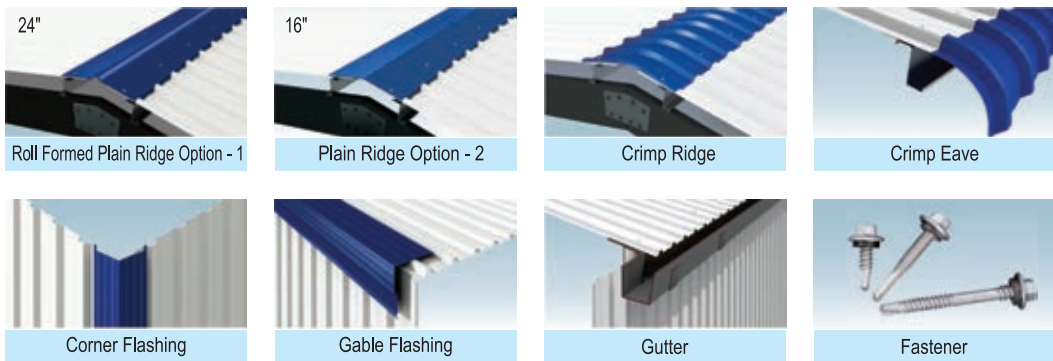

Applications

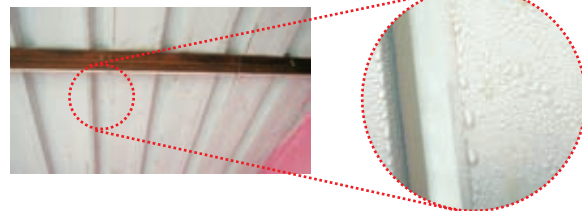

Disclaimer on Condensation:

Condensation is the natural formation of water droplets on the bottom side of any installed metal roofing sheet. It may occur when there is a difference in temperature between the air in the building and the sheet itself, causing the water vapour (moisture) in the air to condense on the inside of the sheet. It is a natural phenomenon and hence no claims will be entertained in this regard.

The risk of condensation may be minimised by providing proper ventilation arrangement in the roofs and by using suitable insulation.



Maintenance Recommendation: Clean and maintain your roof regularly to remove dust and dirt.



Dealer Name and Address

Download DURASHINE® APP



Email: durashine@tatabluescopesteel.com

Website: www.tatabluescopesteel.com