




## Durable, Strong Roof and Wall Sheets

### DURASHINE® Roof

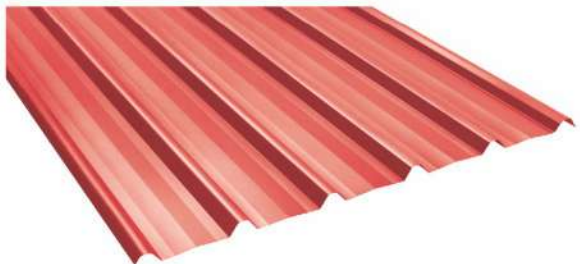

#### Roof Specifications

Total Painted Thickness (mm)	0.37 / 0.47 / 0.52 / 0.62
Sheet length* (mm)	2440 (8ft), 3050 (10ft), 3660 (12ft), 4270 (14ft), 4880 (16ft), 5490 (18ft), 5490 (20ft), 6100 (22ft), 7320 (24ft)
Effective cover width (mm)	Nominal 1015
Overall width (mm)	Nominal 1072
Minimum roof slope (degrees)	5

\* Sheet length in feet is approximate value

#### Maximum Support Spacing (mm)\*

Type of Span	Roof	Wall
Single Span	950	1700
End Span	1200	2450
Internal Span	1750	2850

\* Terms and conditions applicable

Anti-capillary Groove: Anti-capillary grooves ensure leak-proof performance  
Wider Valleys : Wider valleys ensure higher water discharge during heavy rains

### DURASHINE® Wall



#### Wall Specifications

Total Painted Thickness (mm)	0.37 / 0.47 / 0.52 / 0.62
Sheet length* (mm)	2440 (8ft), 3050 (10ft), 3660 (12ft), 4270 (14ft), 4880 (16ft), 5490 (18ft), 5490 (20ft), 6100 (22ft), 7320 (24ft)
Effective cover width (mm)	Nominal 1110
Overall width (mm)	Nominal 1150

\* Sheet length in feet is approximate value

#### Maximum Support Spacing (mm)\*

Type of Span	Wall
Single Span	1150
End Span	1500
Internal Span	1650

\* Terms and conditions applicable


Widest Profile: DURASHINE® wall is one of the widest wall profile sheets available, which is also quick and easy to install



## Benefits of DURASHINE® Roof & Wall

Long Lasting :	High Strength (Min. 550MPa):	Better Thermal Efficiency:
<ul style="list-style-type: none"> <li>Zinc-Aluminum alloy coating provides excellent corrosion resistance compared to galvanized steel.</li> <li>Its superior paint system gives longer product life over pre-painted galvanized steel.</li> <li>The profiles last 2-4 times longer than ordinary colour coated sheets.</li> </ul>	<ul style="list-style-type: none"> <li>Manufactured from high strength raw materials.</li> <li>Saves overall cost of supporting structures. Light weight makes it easy to handle.</li> <li>Longer span and wider spread allow design freedom.</li> </ul>	<ul style="list-style-type: none"> <li>DURASHINE® profiles have high heat reflectivity thereby making it an energy efficient solution.</li> <li>It maintains inside temperature cooler as compared to galvanized sheets, asbestos sheets, concrete slab and clay tiles.</li> </ul>

## DURASHINE® Typical Accessories

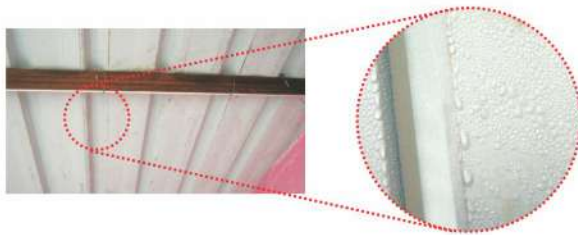

### Disclaimer on Condensation:

Condensation is the natural formation of water droplets on the bottom side of any installed metal roofing sheet. It may occur when there is a difference in temperature between the air in the building and the sheet itself, causing the water vapour (moisture) in the air to

condense on the inside of the sheet. It is a natural phenomenon and hence no claims will be entertained in this regard. The risk of condensation may be minimised by providing proper ventilation arrangement in the roofs and by using suitable insulation.

## Available Standard Colours\*



**Instructions for fasteners:** Use carbon free washers with class 3 fasteners for installing DURASHINE® roofs and accessories



**Maintenance Recommendation:** Clean and maintain your roof regularly to remove dust and dirt.

Colour shades are for reference only and actual colour of the product may vary. Colour range and product range is subject to availability. The above product is subject to the guidelines available at [www.tatabluescopesteel.com](http://www.tatabluescopesteel.com) and this shall not be construed as warranty or guarantee of the product of any kind whatsoever.

Dealer Name and Address



Download the Tata BlueScope Steel App



**1800 270 8333**

Toll Free

Email: [durashine@tatabluescopesteel.com](mailto:durashine@tatabluescopesteel.com)  
Website: [www.tatabluescopesteel.com](http://www.tatabluescopesteel.com)